

**Loadable  
up to 2600 kg!**

Single parking spaces can  
also be upgraded to handle  
heavier loads at a later date!

### Dimensions



Tolerances for space requirements  $+3_0$  ③  
Dimensions in cm.

### Suitable for


Standard passenger cars:  
Limousine, station wagon, SUV, van  
according to clearance and maximal  
surface load.

|            | Standard     | Special ②    |
|------------|--------------|--------------|
| width      | 190 cm ④     | 190 cm ④     |
| weight     | max. 2000 kg | max. 2600 kg |
| wheel load | max. 500 kg  | max. 650 kg  |

### Clearance profile

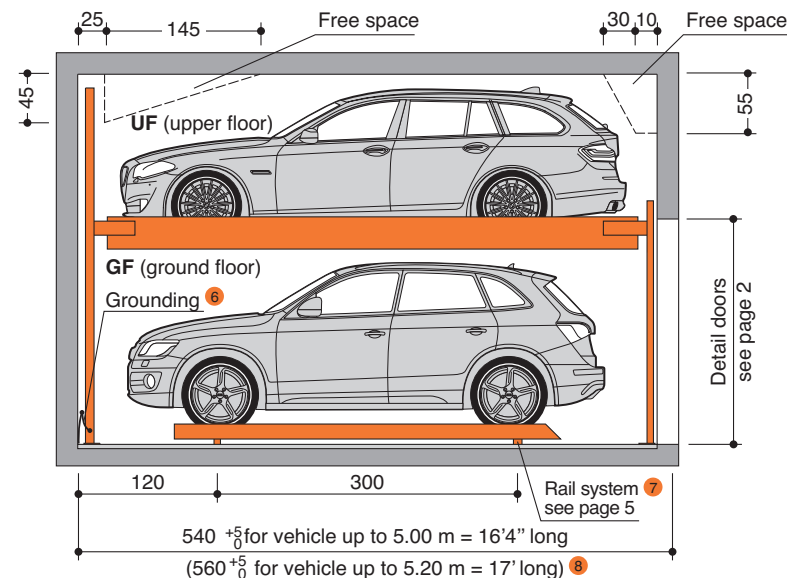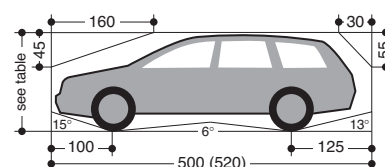


### 4200-160




| height | car height | UF  | GF  |
|--------|------------|-----|-----|
| 330    | 150        | 150 | 150 |

### 4200-175




| height | car height | UF  | GF  |
|--------|------------|-----|-----|
| 345    | 150        | 165 | 165 |

### 4200-180




| height | car height | UF  | GF  |
|--------|------------|-----|-----|
| 370    | 170        | 170 | 170 |

### 4200-185




| height | car height | UF  | GF  |
|--------|------------|-----|-----|
| 380    | 175        | 175 | 175 |

### 4200-210



| height | car height | UF  | GF  |
|--------|------------|-----|-----|
| 405    | 175        | 200 | 200 |

### 4200-215



| height | car height | UF  | GF  |
|--------|------------|-----|-----|
| 440    | 205        | 205 | 205 |

- ① Standard type
- ② Special system: maximum load for extra charge.
- ③ To follow the minimum finished dimensions, make sure to consider the tolerances according to VOB, part C (DIN 18330 and 18331) and the DIN 18202.
- ④ Car width for platform width 230 cm. If wider platforms are used it is also possible to park wider cars.
- ⑤ If height H is larger, vehicles with the maximum height as applicable for the GF can be parked on the UF, otherwise there will be free space available on the ceiling.
- ⑥ Potential equalization from foundation grounding connection to system (provided by the customer).


- ⑦ Tolerances for the evenness of the carriageway (floor) must be strictly complied with in accordance with DIN (=German Industrial Standard) No. 18202, chart 3, line 3.
- ⑧ For convenient use of your parking space and due to the fact that the cars keep becoming longer we recommend a length of 560 cm.



If sprinklers are required make sure to provide the necessary free spaces during the planning stage.


## Garages with sliding doors (standard) I Widths dimensions

### Sliding door behind columns

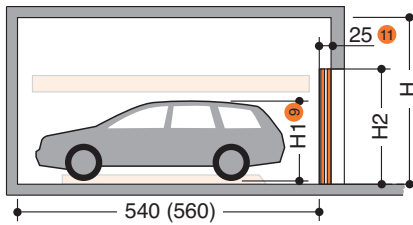


| Type     | H   | H1  | H2  |
|----------|-----|-----|-----|
| 4200-160 | 330 | 150 | 210 |
| 4200-175 | 345 | 165 | 210 |
| 4200-180 | 370 | 170 | 210 |
| 4200-185 | 380 | 175 | 210 |
| 4200-210 | 405 | 200 | 220 |
| 4200-215 | 440 | 205 | 225 |

### Columns per each grid unit

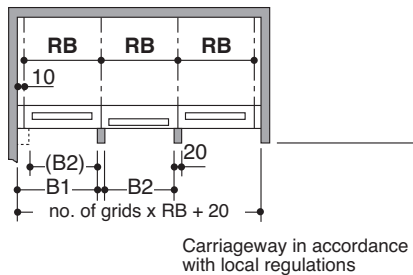


| usable platform width |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| UF                    | GF  | RB  | B1  | B2  |
| 230                   | 220 | 250 | 250 | 230 |
| 240                   | 230 | 260 | 260 | 240 |
| 250                   | 240 | 270 | 270 | 250 |
| 260                   | 250 | 280 | 280 | 260 |
| 270                   | 260 | 290 | 290 | 270 |

### Columns every second grid unit

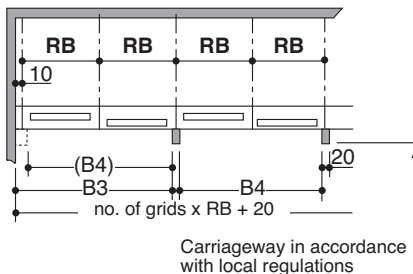

| usable platform width |     |                  |     |     |
|-----------------------|-----|------------------|-----|-----|
| UF                    | GF  | RB <sup>10</sup> | B3  | B4  |
| 230                   | 220 | 250              | 500 | 480 |
| 240                   | 230 | 260              | 520 | 500 |
| 250                   | 240 | 270              | 540 | 520 |
| 260                   | 250 | 280              | 560 | 540 |
| 270                   | 260 | 290              | 580 | 560 |

### Sliding door between columns

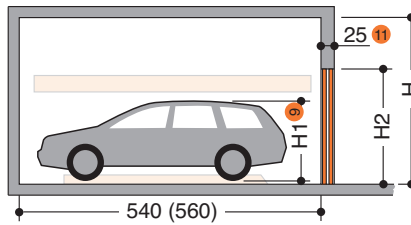


| Type     | H   | H1  | H2  |
|----------|-----|-----|-----|
| 4200-160 | 330 | 150 | 220 |
| 4200-175 | 345 | 165 | 220 |
| 4200-180 | 370 | 170 | 220 |
| 4200-185 | 380 | 175 | 220 |
| 4200-210 | 405 | 200 | 230 |
| 4200-215 | 440 | 205 | 235 |

### Columns per each grid unit


Not available!

### Columns every second grid unit

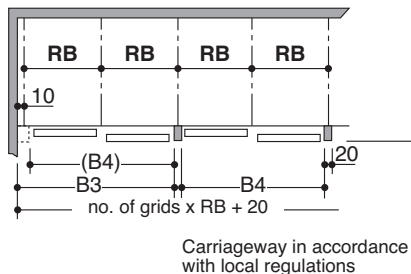


| usable platform width |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| UF                    | GF  | RB  | B3  | B4  |
| 230                   | 220 | 250 | 500 | 480 |
| 240                   | 230 | 260 | 520 | 500 |
| 250                   | 240 | 270 | 540 | 520 |
| 260                   | 250 | 280 | 560 | 540 |
| 270                   | 260 | 290 | 580 | 560 |

### Sliding door in front of columns

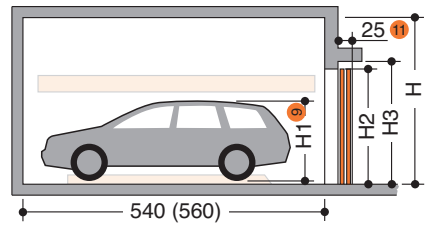


| Type     | H   | H1  | H2  | H3  |
|----------|-----|-----|-----|-----|
| 4200-160 | 330 | 150 | 210 | 220 |
| 4200-175 | 345 | 165 | 210 | 220 |
| 4200-180 | 370 | 170 | 210 | 220 |
| 4200-185 | 380 | 175 | 210 | 220 |
| 4200-210 | 405 | 200 | 220 | 230 |
| 4200-215 | 440 | 205 | 225 | 235 |

### Columns per each grid unit

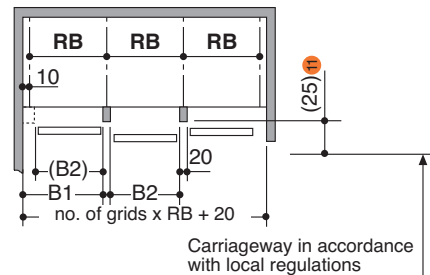

| usable platform width |     |                  |     |     |
|-----------------------|-----|------------------|-----|-----|
| UF                    | GF  | RB <sup>10</sup> | B1  | B2  |
| 230                   | 220 | 250              | 250 | 230 |
| 240                   | 230 | 260              | 260 | 240 |
| 250                   | 240 | 270              | 270 | 250 |
| 260                   | 250 | 280              | 280 | 260 |
| 270                   | 260 | 290              | 290 | 270 |

### Columns every second grid unit

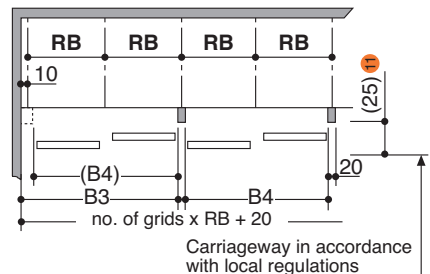

| usable platform width |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| UF                    | GF  | RB  | B3  | B5  |
| 230                   | 220 | 250 | 500 | 480 |
| 240                   | 230 | 260 | 520 | 500 |
| 250                   | 240 | 270 | 540 | 520 |
| 260                   | 250 | 280 | 560 | 540 |
| 270                   | 260 | 290 | 580 | 560 |

! According to the BGR 232, an inspection book is required for the commercial use of a gate with electric drive. Prior to commissioning, and then once a year, the gate has to be inspected by an expert and the findings entered in the inspection book. The inspection has to be carried out independent of any maintenance work.

For parking boxes on the edges and boxes with intermediate walls we recommend our maximum platform width of 270 cm. Please consider adjoining grids. Problems may occur if smaller platform widths are used (depending on car type, access and individual driving behaviour and capability).

For larger limousines and SUV wider driveways are necessary (in particular on the boxes on the sides due to the missing manoeuvring radius).


⑨ H1 = Height of the vehicle on ground floor platform.

⑩ RB = Grid unit width **must** strictly conform to dimensions quoted!

⑪ Only applies to manually operated doors. The electrically driven doors must have 35 cm.


## Garages with roll doors | Widths dimensions

### Roll door behind columns

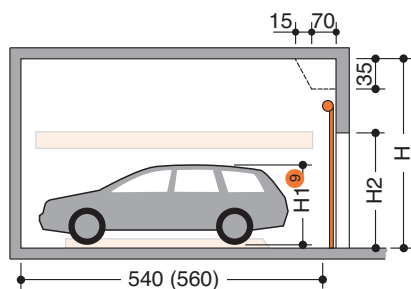

| Type     | H   | H1  | H2  | roll door height |
|----------|-----|-----|-----|------------------|
| 4200-160 | 330 | 150 | 210 | 263              |
| 4200-175 | 345 | 165 | 210 | 263              |
| 4200-180 | 370 | 170 | 210 | 263              |
| 4200-185 | 380 | 175 | 210 | 263              |
| 4200-210 | 405 | 200 | 220 | 300              |
| 4200-215 | 440 | 205 | 225 | 300              |

### Columns per each grid unit

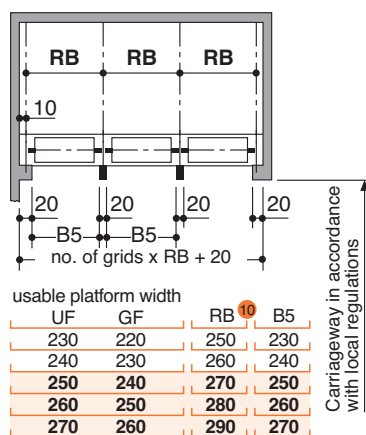

⚠ According to the BGR 232, an inspection book is required for the commercial use of a gate with electric drive. Prior to commissioning, and then once a year, the gate has to be inspected by an expert and the findings entered in the inspection book. The inspection has to be carried out independent of any maintenance work.


For parking boxes on the edges and boxes with intermediate walls we recommend our maximum platform width of 270 cm. Please consider adjoining grids. Problems may occur if smaller platform widths are used (depending on car type, access and individual driving behaviour and capability).

For larger limousines and SUV wider driveways are necessary (in particular on the boxes on the sides due to the missing manoeuvring radius).

⑨ H1 = Height of the vehicle on ground floor platform.


⑩ RB = Grid unit width **must** strictly conform to dimensions quoted!

## Approach

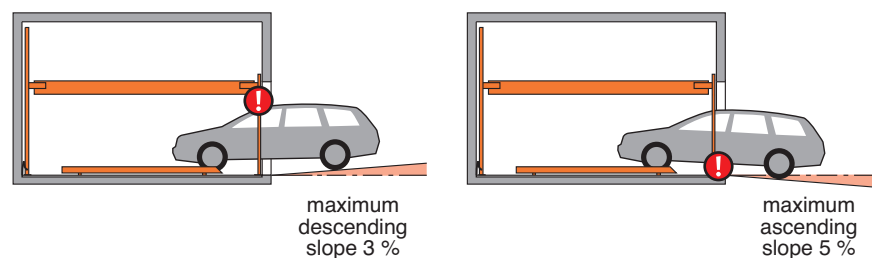

⚠ The illustrated maximum approach angles must not be exceeded. Incorrect approach angles will cause serious manoeuvring & positioning problems on the parking system for which the local agency of KLAUS Multiparking accepts no responsibility.


## Longitudinal free space

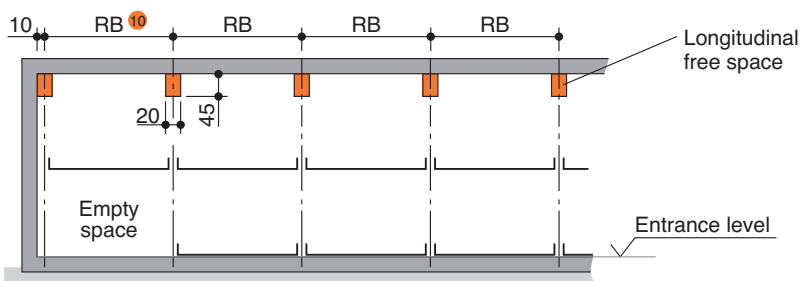

⑩ RB = Grid unit width **must** strictly conform to dimensions quoted!

## Function with standard numbering and identification of parking levels

e.g. for parking space No. 4: Check first that all doors are closed, then select No. 4 on operating panel.

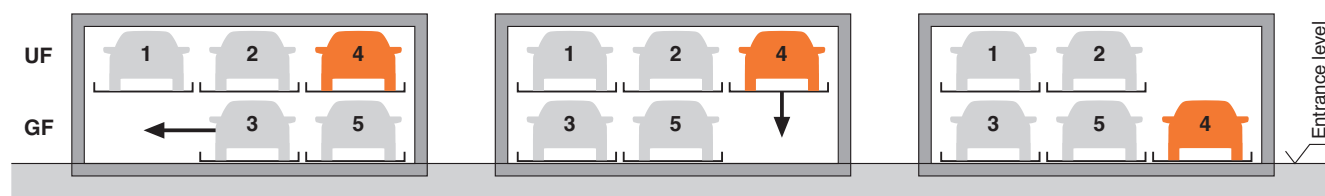


For driving the vehicle off platform No. 4 the ground floor parking platforms are shifted to the left.

The empty space is now below the vehicle which shall be driven off the platform. The platform No. 4 will be lowered.


The vehicle on platform No. 4 can now be driven off the platform.

## Load plan

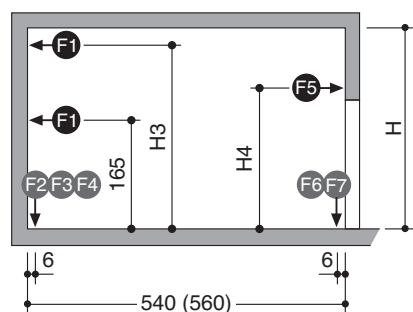

| Type     | H   | H3  | H4  |
|----------|-----|-----|-----|
| 4200-160 | 330 | 295 | 210 |
| 4200-175 | 345 | 310 | 225 |
| 4200-180 | 370 | 315 | 230 |
| 4200-185 | 380 | 320 | 235 |
| 4200-210 | 405 | 345 | 260 |
| 4200-215 | 440 | 350 | 265 |

## Load plan – top view

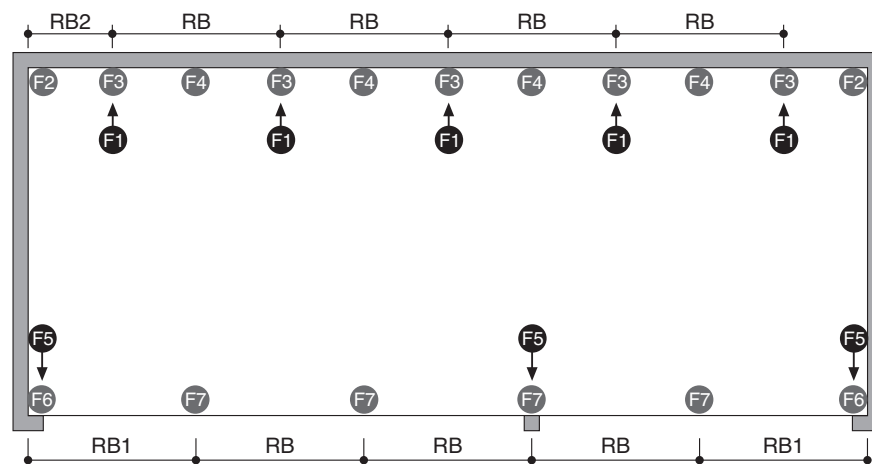

| usable platform width | RB <sup>10</sup> | RB1 | RB2 |
|-----------------------|------------------|-----|-----|
| 230                   | 250              | 260 | 135 |
| 240                   | 260              | 270 | 140 |
| 250                   | 270              | 280 | 145 |
| 260                   | 280              | 290 | 150 |
| 270                   | 290              | 300 | 155 |

| platform load | F1 | F2  | F3  | F4  | F5       | F6         | F7         |
|---------------|----|-----|-----|-----|----------|------------|------------|
| 2000 kg       | ±2 | -9  | +38 | -18 | ca. +0,5 | +9<br>-7   | +18<br>-14 |
| 2600 kg       | ±2 | -11 | +41 | -22 | ca. +0,5 | +12<br>-10 | +24<br>-20 |



The system is dowelled to floor and walls. The drilling depth in the floor is approx. 15 cm. The drilling depth in the walls is approx. 12 cm.

Floor and walls are to be made of concrete (grade of concrete min. C20/25)!

The dimensions for the points of support are rounded values. If the exact position is required, please contact KLAUS Multiparking.

<sup>10</sup> RB = Grid unit width **must** strictly conform to dimensions quoted!

<sup>12</sup> All forces in kN


## Recess/Rail system

Dependent upon the structural conditions of the garage, several different options are available for installation of the rails.


Rail load by moving traffic load:

- For surface load 2000 kg: 6,5 kN per wheel
- For surface load 2600 kg: 8 kN per wheel

### Laying on strip foundation <sup>13</sup>

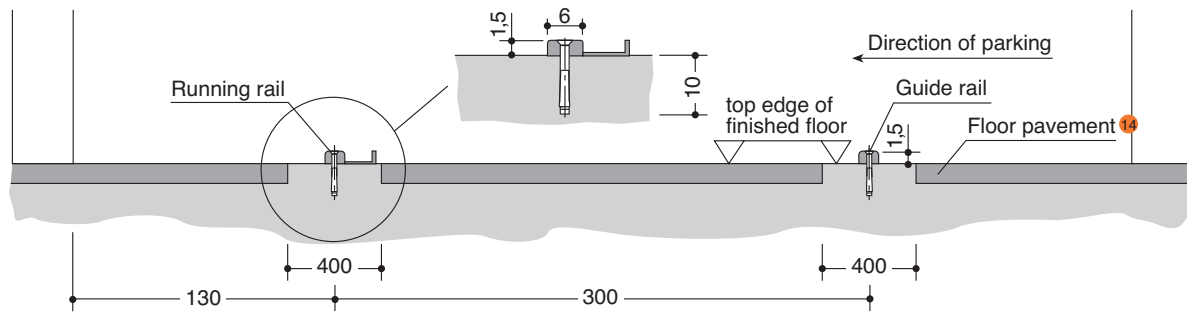

### Laying on finished floor <sup>13</sup>

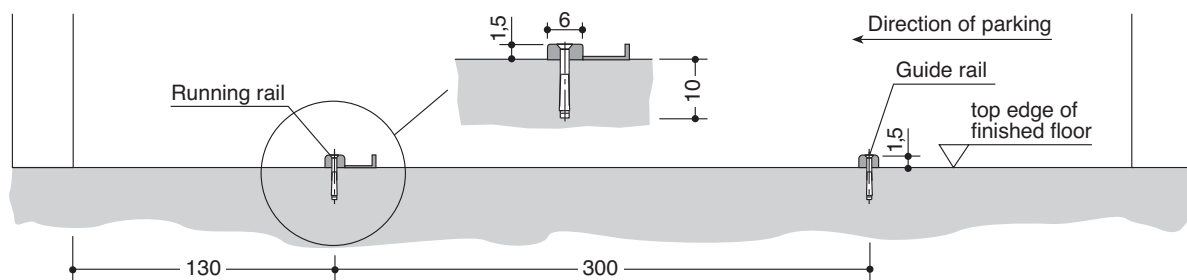


<sup>13</sup> Tolerances for the evenness of the carriageway must be strictly complied with in accordance with DIN (= German Industrial Standard) No. 18202, chart 3, line 3. No expansion joints are permitted within the area of the rail system.

<sup>14</sup> We do not recommend mastic asphalt.

## Evenness and Tolerances (abstract from DIN 18 202, table 3)

The distance between the lower flange of the ParkBoards and the garage ground must therefore not exceed 2 cm. To adhere to the safety regulations and DIN EN 14 010 recommendations and to get the necessary even ground, the tolerances of evenness to DIN 18202, table 3, line 3, must not be exceeded. Therefore exact levelling of the ground by the client is essential.

| Column | 1                                                                                                                                                                                                                                                                   | 2                                                                                          | 3 | 4  | 5  | 6  |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---|----|----|----|
| Line   | Reference                                                                                                                                                                                                                                                           | Vertical measurement as limits in mm with measuring points distances in m to <sup>15</sup> |   |    |    |    |
|        |                                                                                                                                                                                                                                                                     | 0,1                                                                                        | 1 | 4  | 10 | 15 |
| 2      | Unfinished to surface of covers, subconcrete and subsoils for higher demands, e.g. as foundation for cast plaster floor, industrial soils, paving tiles and slabstone paving, compound floor paving. Finished surfaces for minor purposes, e.g. warehouses, cellar. | 5                                                                                          | 8 | 12 | 15 | 20 |
| 3      | Finished grounds, e.g. floor pavement serving as foundation for coverings. Coverings, tile coverings, PVC flooring and glued coverings.                                                                                                                             | 2                                                                                          | 4 | 10 | 12 | 15 |

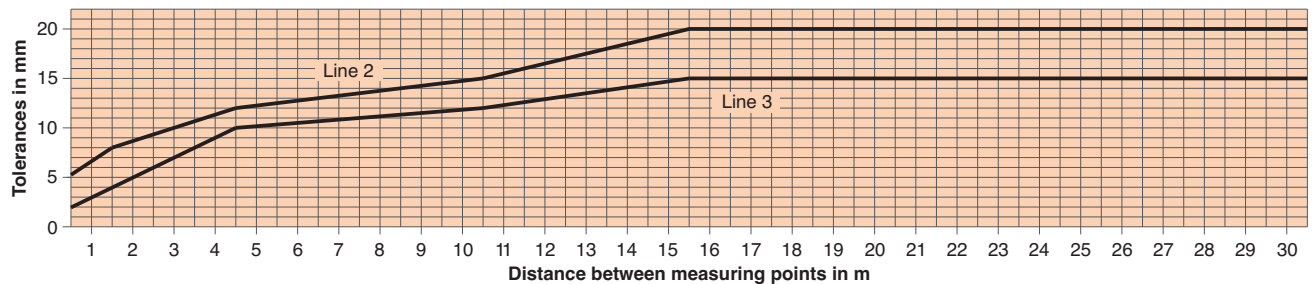

<sup>15</sup> Intermediate values are to be taken out the diagram and must be rounded-off to mm.

## Technical data

### Field of application

By default, the system can only be used for a fixed number of users.

If different users use the system (e.g. short-time parkers in office buildings or hotels) the Multiparking system needs to be adjusted. If required, would you please contact us.

### Available documents

- wall recess plans
- maintenance offer/contract
- declaration of conformity
- test sheet on airborne and slid-borne sound

### Environmental conditions

Environmental conditions for the area of multiparking systems: Temperature range –10 to +40° C. Relative humidity 50% at a maximum outside temperature of +40° C.

If lifting or lowering times are specified, they refer to an environmental temperature of +10° C and with the system set up directly next to the hydraulic unit. At lower temperatures or with longer hydraulic lines, these times increase.

### Numbering

Standard numbering of the parking spaces:



Different numbering is only possible at extra cost

Please take note of the following specifications:

- In general, the empty space must be arranged to the left.
- The numbers must be provided 8 – 10 weeks before the delivery date.

### Sound insulation

According to DIN 4109 (Sound insulation in buildings), para. 4, annotation 4, KLAUS Multiparkers are part of the building services (garage systems).

#### Normal sound insulation:

DIN 4109, para. 4, Sound insulation against noises from building services.

Table 4 in para. 4.1 contains the permissible sound level values emitted from building services for personal living and working areas. According to line 2 the maximum sound level in personal living and working areas must not exceed 30 dB (A).

*Noises created by users are not subject to the requirements (see table 4, DIN 4109).*

The following measures are to be taken to comply with this value:

- Sound protection package according to offer/order (KLAUS Multiparking GmbH)
- Minimum sound insulation of building  $R'_w = 57$  dB (to be provided by customer)

#### Increased sound insulation (special agreement):

Draft DIN 4109-10, Information on planning and execution, proposals for increased sound insulation.

Agreement: Maximum sound level in personal living and working areas 25 dB (A). *Noises created by users are not subject to the requirements (see table 4, DIN 4109).*

The following measures are to be taken to comply with this value:

- Sound protection package according to offer/order (KLAUS Multiparking GmbH)
- Minimum sound insulation of building  $R'_w = 62$  dB (to be provided by customer)

Note: User noises are noises created by individual users in our Multiparking systems. These can be noises from accessing the platforms, slamming of vehicle doors, motor and brake noises.

### Electrically driven doors

In accordance with BGR 232 commercially used power-driven doors must be subjected to annual inspections. We urgently recommend concluding a maintenance agreement that includes this service for the entire system.

### Building application documents

According to LBO and GaVo (garage regulations) the Multiparking systems are subject to approval. We will provide the required building application documents.

### Care

To avoid damages resulting from corrosion, make sure to follow our cleaning and care instructions and to provide good ventilation of your garage.

### Corrosion protection

See separate sheet regarding corrosion protection.

### CE Certification

The systems on offer comply with DIN EN 14010 and EC Machine Directive 2006/42/EC. Furthermore, this system underwent voluntary conformity testing by TÜV SÜD.


CERTIFICAT ◆ CERTIFICADO ◆ CERTIFIKAT ◆ 證書証書 ◆ CERTIFICATE ◆



### Certificate concerning the examination of conformity

|                                                                 |                                                                                                                                                                                                |
|-----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Certificate no:</b>                                          | <b>KP 193</b>                                                                                                                                                                                  |
| <b>Certification body:</b>                                      | TÜV SÜD Industrie Service GmbH<br>Zertifizierungsstelle für Produkte der Fördertechnik<br>Westendstr. 199<br>80686 München - Germany                                                           |
| <b>Applicant / Certification holder:</b>                        | Klaus Multiparking GmbH<br>Hermann-Krum-Str. 2<br>88319 Altrach - Germany                                                                                                                      |
| <b>Date of application:</b>                                     | 2012-03-09                                                                                                                                                                                     |
| <b>Manufacturer:</b>                                            | Klaus Multiparking GmbH<br>Hermann-Krum-Str. 2<br>88319 Altrach - Germany                                                                                                                      |
| <b>Product:</b>                                                 | Equipment for power driven parking of motor vehicles                                                                                                                                           |
| <b>Type:</b>                                                    | <b>TrendVario 4200 2.000 kg and 2.600 kg</b>                                                                                                                                                   |
| <b>Test laboratory:</b>                                         | TÜV SÜD Industrie Service GmbH<br>Prüflaboratorium für Produkte der Fördertechnik<br>Prüfbereich Maschinen der Fördertechnik<br>Gottlieb-Daimler-Str. 7<br>70794 Filderstadt – Germany         |
| <b>Date and number of the test report / mark of conformity:</b> | 2014-01-22<br><b>TÜ SW-12-229 DG</b>                                                                                                                                                           |
| <b>Test specifications:</b>                                     | - 2006 / 42 / EC, Annex I<br>- DIN EN 14010                                                                                                                                                    |
| <b>Validity:</b>                                                | <b>This Certificate is valid until 2019-02-13</b>                                                                                                                                              |
| <b>Result:</b>                                                  | The equipment fulfills the requirements of the test specifications for the respective scope of application stated in the annex (page 1) of this certificate, keeping the mentioned conditions. |
| <b>Date of issue:</b>                                           | 2014-02-14                                                                                                                                                                                     |

Certification body for lifts and cranes




Chadi Nouredine

TUV®




## Electrical data

### Control box

The control box must be accessible at all times from outside!

Dimensions approx. 100 x 100 x 30 cm.

Cutting through of wall from control box to parking system (contact the local agency of KLAUS Multiparking for clarification).

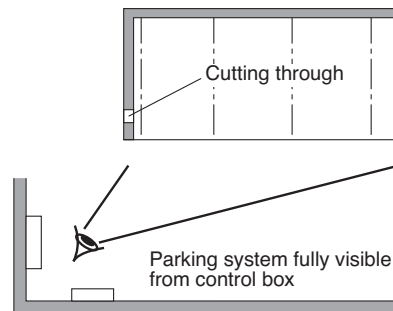

### Electrical supply to the control box / Foundation earth connector

Suitable electrical supply min. 5 x 2,5 mm<sup>2</sup> (3 PH+N+PE) to control box with mains fuse 3 x 16 A slow or over-current cut-out 3 x 16 A trigger characteristic K or C. DIN/VDE and local regulations must be taken into consideration.

Suitable electrical supply to the control box must be provided by the customer during installation. The functionality can be monitored on site by our fitters together with the electrician. If this cannot be done during installation for some reason for which the customer is responsible, the customer must commission an electrician at their own expense and risk.

In accordance with DIN EN 60204 (Safety of Machinery. Electrical Equipment), grounding of the steel structure is necessary, provided by the customer (distance between grounding max. 10 m).

### Operating device

Easy-to-survey positioning (e.g. on column).

Protection against unauthorized use.

May also be recessed in wall if required.

## To be performed by the customer

### Safety fences

Any constraints that may be necessary according to DIN EN ISO 13857 in order to provide protection, for pathways directly in front, next to or behind the unit. This is also valid during construction.

### Numbering of parking spaces

Consecutive numbering of parking spaces.

### Building services

Any required lighting, ventilation, fire extinguishing and fire alarm systems as well as clarification and compliance with the relevant regulatory requirements.

### Wall cuttings

Any necessary wall cuttings.

### Electrical supply to the control box / Foundation earth connector

Suitable electrical supply to the control box must be provided by the customer during installation. The functionality can be monitored on site by our fitters together with the electrician. If this cannot be done during installation for some reason for which the customer is responsible, the customer must commission an electrician at their own expense and risk.

In accordance with DIN EN 60204 (Safety of Machinery. Electrical Equipment), grounding of the steel structure is necessary, provided by the customer (distance between grounding max. 10 m).

### Door suspension

The lintel height H2 (see page 2) is absolutely necessary. With differing heights, additional fixings are required for extra charge.

### Door shields

The lintel height H2 (see page 2) is absolutely necessary. With differing heights, additional fixings are required for extra charge.

### Floor / Rails

Flooring structure in accordance with our instructions, please see page 5 (recesses, rail systems).

Recesses, tolerances for the evenness of the driving lane must adhere to DIN 18202, sheet 3, line 3.

Stuffing of rail system with cement floor for the whole length.

Bringing in of floor pavement.

### If the following are not included in the quotation, they will also have to be provided / paid for by the customer:

- Costs for final technical approval by an authorized body

## Description

### General description:

Multiparking system providing independent parking spaces for cars, one on top of the other and side by side.

Dimensions are in accordance with the underlying dimensions of height and width.

The parking bays are accessed horizontally (installation deviation  $\pm 1\%$ ).

Along the complete width of the parking automat an approach lane (driving lane in accordance with local regulations) must be available. Parking spaces are arranged on two different levels, one level on top of the other.

The platforms of the upper floor (UF) are moved vertically, the platforms on the ground floor (GF) horizontally. At approach level (GF) there is always one parking space less available. This vacant space is used for shifting the ground floor (GF) parking spaces sideways, thus enabling the upper platform (UF) parking space located above to be lowered to approach/ground level. Consequently, a unit of three parking spaces (1 on the ground floor, 2 on the upper floor) is the smallest unit available for this parking system.

The TrendVario 4200 allows parking of passenger cars and station wagons.

For safety reasons the platforms can only be moved behind electromagnetically locked doors.

All necessary safety devices are installed. This consists mainly of a chain monitoring system, locking lever for the upper platforms and electromagnetic door locks.

The doors can only be opened if the selected parking space has reached the park position.

### A steel framework mounted to the floor consisting of:

- Seriated supports
- Steel pillars with sliding platform supports
- Cross and longitudinal members
- running rails for the transversely movable ground floor (GF) platforms

### Platforms consisting of:

- Side members
- Cross members
- Platform base sections
- 1 wheel stop (on the right per parking space)
- Screws, small parts, etc.

### Lifting device for upper floor (UF) platforms:

- Hydraulic cylinder with solenoid valve
- Chain wheels
- Chains
- Limit switches
- The platforms are suspended on four points and guided along the supports using plastic sliding bearings

### Drive unit of transversely movable platforms on the ground floor (GF):

- Gear motor with chain wheel
- Chains
- Running and guide rollers (low-noise)
- Power supply via cable chain

### Hydraulic unit consisting of:

- Hydraulic power unit (low-noise, installed onto a console with a rubber-bonded-to-metal mounting)
- Hydraulic oil reservoir
- Oil filling
- Internal geared wheel pump
- Pump holder
- Clutch
- 3-phase-AC-motor (3.0 kW, 230/400 V, 50 Hz)
- Motor circuit breaker
- Test manometer
- Pressure relief valve
- Hydraulic hoses (which reduce noise transmission onto the hydraulic pipe)

### Control system:

- Central control panel (operating device) used to select the desired parking space
- With series installation, the doors are opened manually
- If desired, this can also be done using electric motors
- Electric wiring is made from the electric cabinet by the manufacturer

### Laterally movable doors:

#### Size

Sliding door, dimensions: approx. 2500 mm x 2000 mm (width x height).

#### Frame

- Frame construction with vertical centre stay bar made from extruded aluminium profiles (anodized, layer thickness approx 20  $\mu\text{m}$ ).
- To open the doors a recessed grip is integrated in the aluminium profile.
- A rubber lip is used for the finishing of the closing edge to the building.

#### Standard door panel

Perforated steel plate

- Thickness 1mm, RV 5/8, galvanized, layer thickness: approx. 20  $\mu\text{m}$
- Ventilation cross-section of the panel approx. 40%
- Not suitable for outdoor garages

#### Alternative door panel

Perforated aluminium plate

- Thickness 2mm, RV 5/8 E6/EV1, anodized, layer thickness: approx. 20  $\mu\text{m}$
- Ventilation cross-section of the panel approx. 40%

Beaded steel plate

- Thickness 1mm, galvanized, layer thickness: approx. 20  $\mu\text{m}$ .
- additional power coating, layer thickness: approx. 25  $\mu\text{m}$  on the outside and approx. 12  $\mu\text{m}$  on the inside
- Colour options for the outside (building view):  
RAL 1015 (light ivory), RAL 3003 (ruby),  
RAL 5014 (pigeon blue), RAL 6005 (moss green),  
RAL 7016 (charcoal grey), RAL 7035 (light grey),  
RAL 7040 (window grey), RAL 8014 (sepia),  
RAL 9006 (white aluminium), RAL 9016 (traffic white)
- Inside of the gates in light grey

Plain aluminium sheet

- Thickness 2mm, E6/EV1, anodized, layer thickness: approx. 20  $\mu\text{m}$

Wooden panelling

- Nordic spruce in grade A
- vertical tongue and groove boards
- preimpregnated colourless

Laminated safety glass

- Laminated safety glass made from single pane safety glass 8/4mm

Wire grating

- Mesh size 12 x 12 mm
- Mesh size 40 x 40 mm (for manual sliding gates only)

#### Running rails

- The running gear of each doors consists of 2 twin-pair rolling gadgets, adjustable in height
- The running rails of the doors are fixed to brackets or the concrete lintel, or on a building-specific door suspension using ceiling fittings
- The guide consists of 2 plastic rollers mounted to a base plate, which is dowelled to the floor
- Running rails, ceiling fittings and guide roller base plate are hot-dip galvanized

#### Door actuation

Standard:

- Manually, i.e. the door is opened and closed by hand

Alternatively:

- Electric drive via electric motor mounted to the rail system at the turning point of the sliding doors. The drive pinion engages into the chain mounted to the door.

For safety reasons the movement of the platforms is always made behind locked doors. Position sensing, i.e. "door open" and "door closed" is effected by electric signalers.

#### Separation (if necessary):

- Upon request

#### Please note:

Door panels (on the side, cover for running rails, etc.) and door suspensions are not included in the standard version but can be delivered against surcharge as special equipment.

## We reserve the right to change this specification without further notice

KLAUS Multiparking reserves the right in the course of technical progress to use newer or other technologies, systems, processes, procedures or standards in the fulfillment of their obligations other than those originally offered provided the customer derives no disadvantage from their so doing.

|            |                                               |
|------------|-----------------------------------------------|
| Page 1     | Section                                       |
| Dimensions | Car data                                      |
| Page 2     | Width dimensions                              |
| Page 3     | Width dimensions<br>Approach<br>Free spaces   |
| Page 4     | Function<br>Load plan                         |
| Page 5     | Rails                                         |
| Page 6     | Technical data                                |
| Page 7     | Electrical<br>To be performed by the customer |
| Page 8     | Description                                   |